

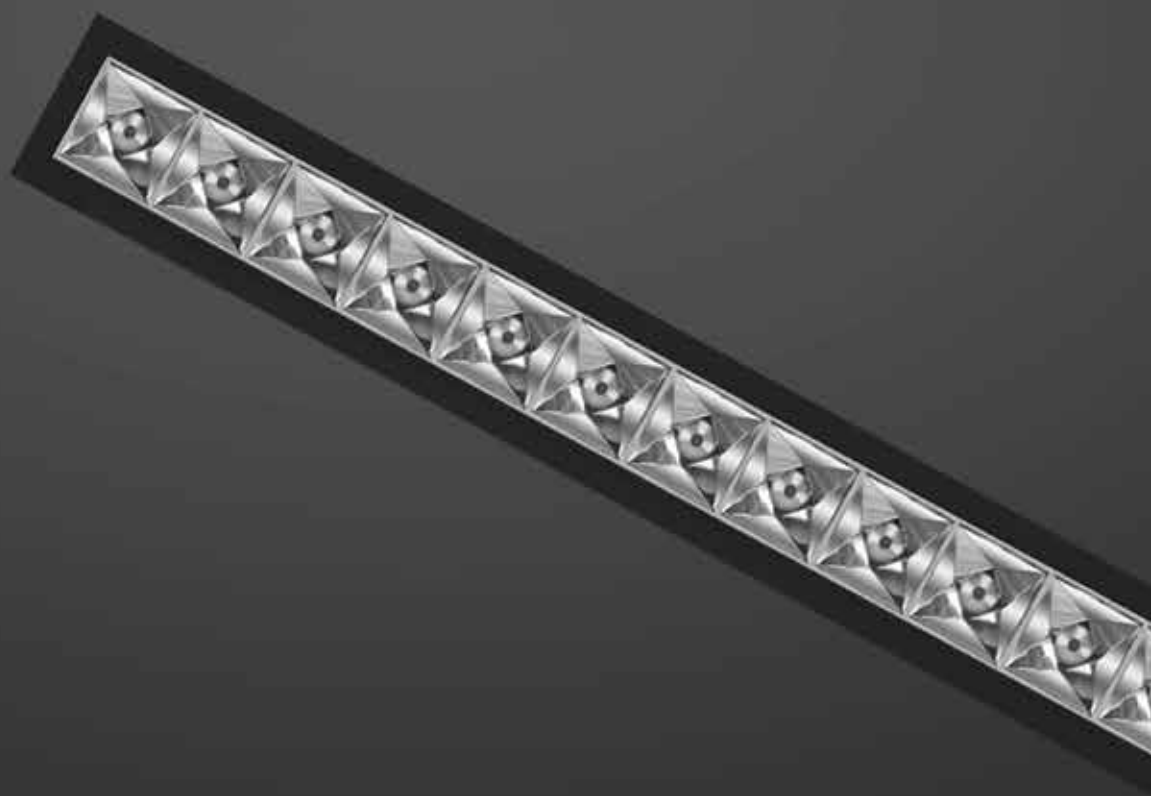


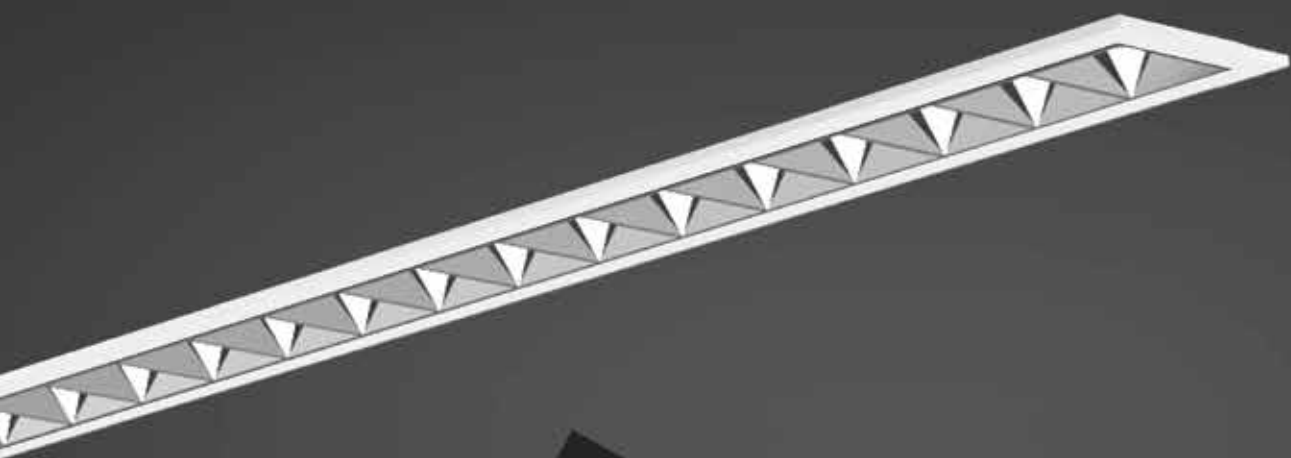

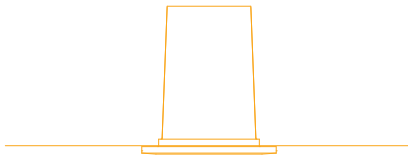

IVO

Silhouette of the Elegant Shape

Ivo impresses with its up to 1200 mm long elegant housing, bringing you more quality light and cost-savings.

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light. Therefore, it is most suitable for high-end office, supermarkets, conference rooms, office buildings and other spacious environments.

K-LITE

IVO

Power : 35W 45W
Length : 602mm 1202mm

Upto
120
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L2: Vaccum Metalized Chrome Finish, UGR <12

Beam Angle



34°




48°




Wall Wash

RECESS

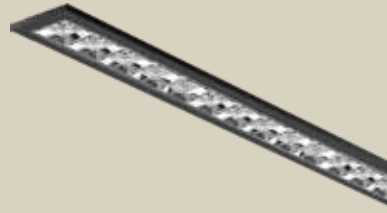

Dimension
in mm

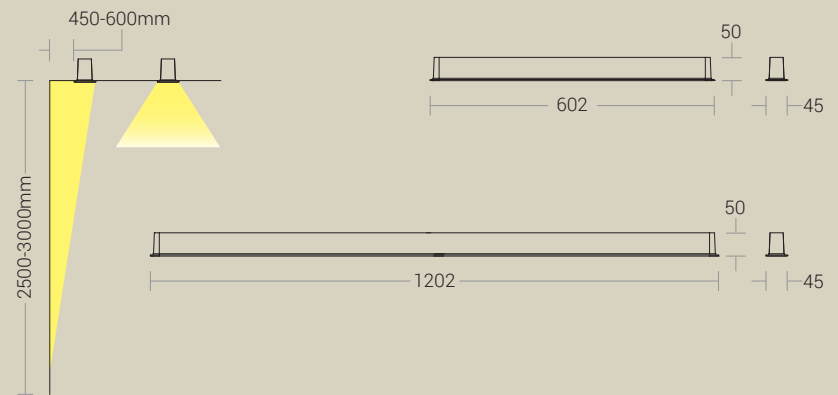


Housing Colour




High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution

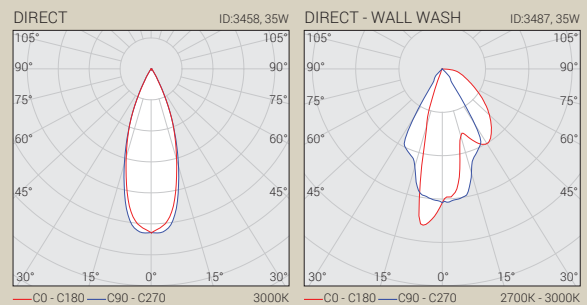

L2 - Direct



L2 - Wall Wash



Technical Specifications

General		Physical	
Driver	: Constant Current	Body	: High-Grade Aluminium with Die-cast Endcaps
Input Voltage	: 220-240Vac	Mounting	: Recessed
Operating Temperature	: +25°C~+55°C	Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)
Light Source			
Light Source	: NICHIA		
CRI (Ra)	: >80 (>90 On Request)		
LED Colour Temperature	: 3000K / 4000K / 5700K		
Optical		Driver	
Efficiency	: >90%	Power Supply	: Integrated
Tilt	: Fixed	Power Factor	: >0.90
Beam Angle	: 34°, 48°, Wall Wash	THD	: <10%
Diffuser/Lens Material	: Polycarbonate	Surge Protection	: 3KV
Diffuser Finish	: Vacuum Metalized Chrome Finish	Efficiency	: >85%
UGR	: <12		

Ordering Guide

Recess - Direct

ID	Wattage	Dimension (mm)
3458	35W	602 x 45 x 50
3459	45W	1202 x 45 x 50

Recess - Wall Wash

ID	Wattage	Dimension (mm)
3487	35W	602 x 45 x 50
3488	45W	1202 x 45 x 50