

K-LITE

LEVO

Power : 30W / 40W 60W
Length : 1200 mm 2400 mm

Upto
100
lm/w

Features

- LUMILED / NICHIA
- 3000K / 4000K / 6000K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 50,000 Hrs



198-264V 50Hz

Options

- Through wiring
- Dimmable options



Switchable



Beam Angle




115°
Diffused



RECESSED



Dimension
in mm




Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online

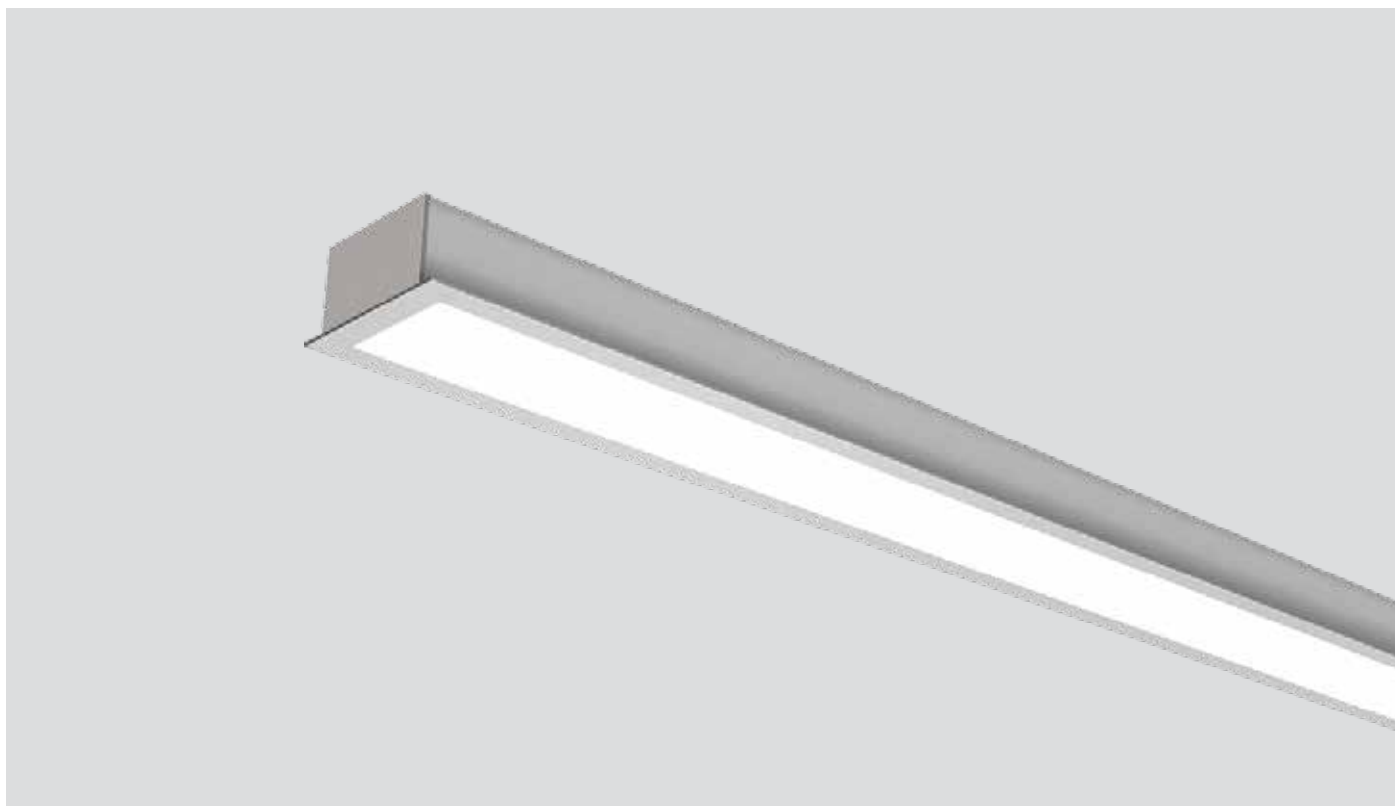

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Temperature	: 0°C~+50°C

Physical

Body	: Extruded Aluminium Profile
Mounting	: Recess
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Light Source

Light Source	: LUMILED / NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 6000K

Driver

Power Supply	: Non Integral
Power Factor	: >0.90
THD	: <15%
Surge Protection	: 3KV
Efficiency	: >85%

Optical

Tilt	: Fixed
Beam Angle	: 115°
Diffuser Material	: PC Opal Matt / Prismatic Diffuser
UGR	: <21

Ordering Guide

Recess - Direct - Opal Matt

ID	Wattage	Dimension (mm)
2854	30W	1200 x 64 x 35
2855	40W	1200 x 64 x 35
2858	60W	2400 x 64 x 35

Recess - Direct - Prismatic

ID	Wattage	Dimension (mm)
2851	30W	1200 x 64 x 35
2852	40W	1200 x 64 x 35
2853	60W	2400 x 64 x 35