


INSPIRATION



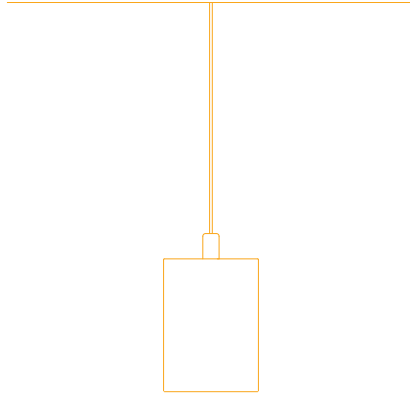

DEEP

Unobstructed Light Line

Linear pendant lighting designed for continuous lighting systems. Unobstructed illumination offering coherent solutions suitable for any kind of space.

Our modern, slim profiles and stylish linear design offer excellent direct lighting, exceptional performance and versatility combined with visually comfortable and efficient light for offices, conference rooms, museums, retail outlets, hotels, restaurants and more.

K-LITE

DEEP

Power : 30W / 40W

Length: 1200mm

Upto
100
lm/w

Features

- NICHIA LED's
- 3000K / 4000K / 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- Through wiring
- Dimmable options




Beam Angle



120°
Diffused


Accessories




Canopy Kit

For control unit
Bespoke Colour Options

PENDANT
DIRECT

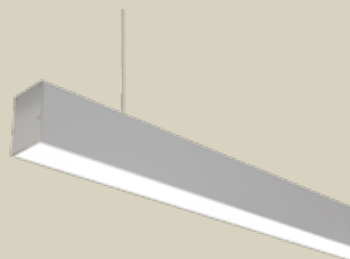

Dimension
in mm

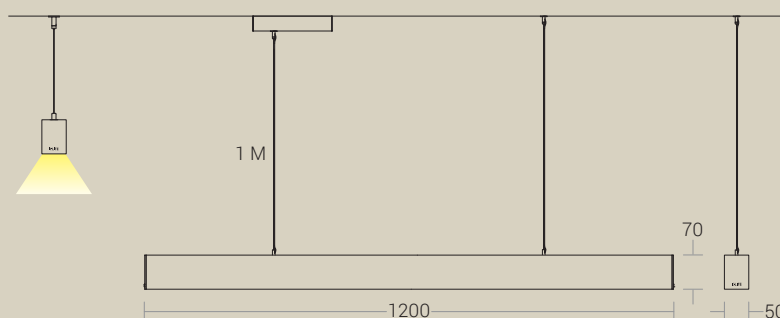



Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution



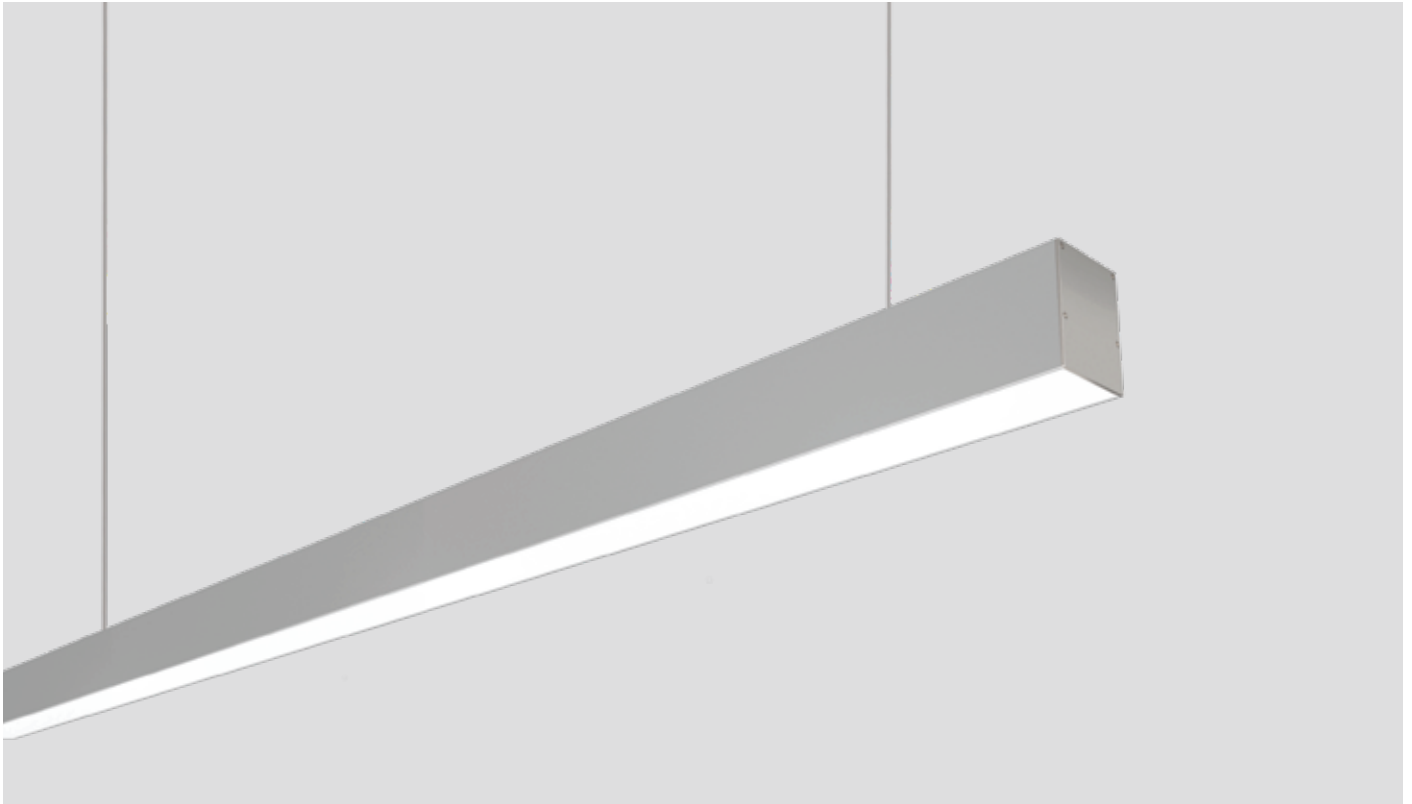

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 120°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal Matt
UGR	: <19

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3411	30W	1200 x 50 x 70
3412	40W	1200 x 50 x 70