



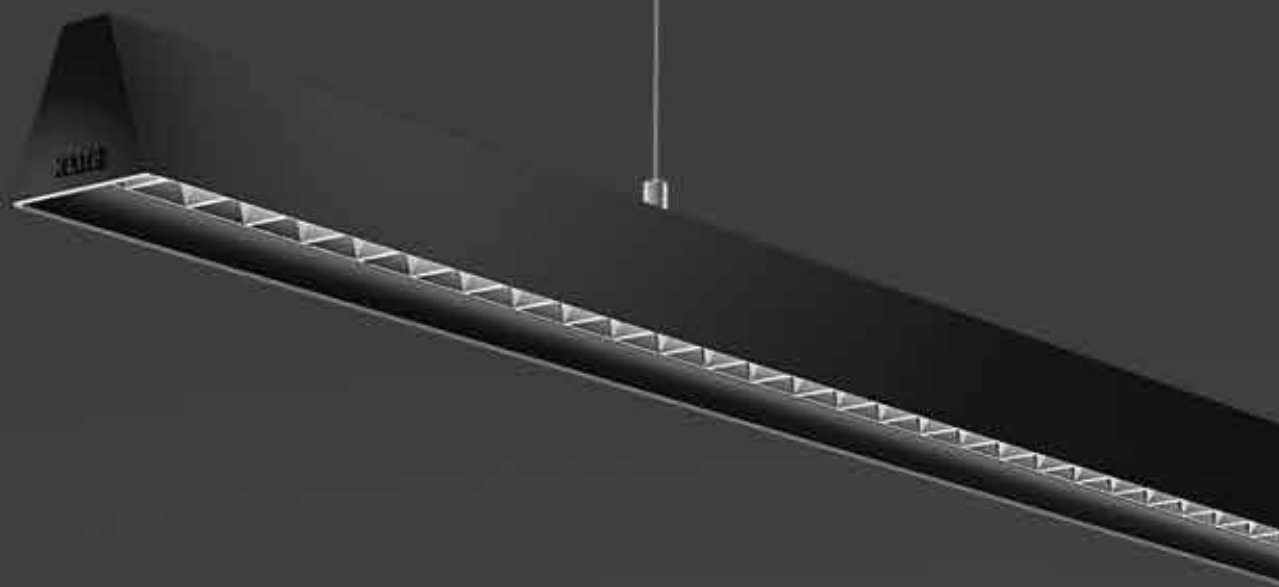

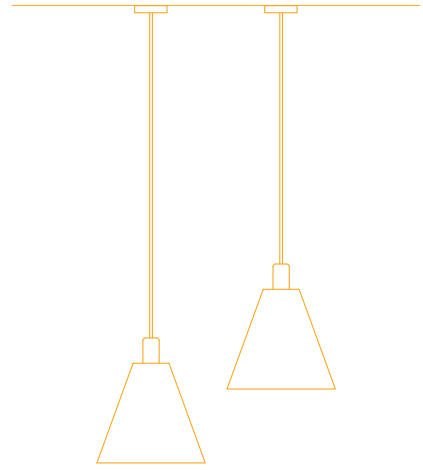

ARC

Elegance of Simplicity

Arc-L & D Pendant Direct / Indirect luminaire, offers high quality, economical and easy to install modular lighting solutions. It offers premium lighting environment for sustainable Offices, Educational institutions, Retail and General areas. High-performance optic for maximum light efficiency and glare controlled light distribution with low UGR.

K-LITE

ARC-L

Power : 30W/40W 60W 90W
Length: 1188mm 2364mm 3540mm

Upto
100
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options




Beam Angle



50°

Accessories



Canopy Kit

For control unit
Bespoke Colour Options


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

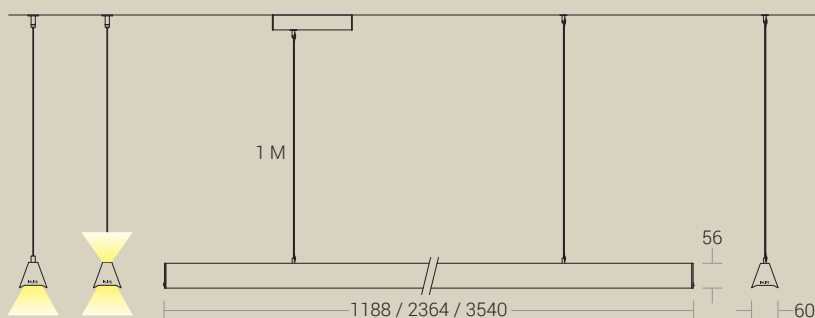


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution





Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Hexa-Cell (Matt Black)
UGR	: <14

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3476	30W	1188 x 60 x 56
3477	40W	1188 x 60 x 56
3478	60W	2364 x 60 x 56
3479	90W	3540 x 60 x 56

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3428	30W & 10W	1188 x 60 x 56
3429	40W & 10W	1188 x 60 x 56
3439	60W & 20W	2364 x 60 x 56
3440	90W & 20W	3540 x 60 x 56